

Best Available Copy

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo			SE	Sweden
CH	Switzerland	KR	Republic of Korea	SI	Slovenia
CI	Côte d'Ivoire	KZ	Kazakhstan	SK	Slovakia
CM	Cameroon	LI	Liechtenstein	SN	Senegal
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Latvia	TJ	Tajikistan
DE	Germany	MC	Monaco	TT	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gabon				

DISTRIBUTED VOICE RECOGNITION SYSTEM

BACKGROUND OF THE INVENTION

5 I. Field of the Invention

The present invention relates to speech signal processing. More particularly, the present invention relates to a novel method and apparatus for realizing a distributed implementation of a standard voice recognition system.

10

II. Description of the Related Art

Voice recognition represents one of the most important techniques to endow a machine with simulated intelligence to recognize user or user voiced commands and to facilitate human interface with the machine. It also represents a key technique for human speech understanding. Systems that employ techniques to recover a linguistic message from an acoustic speech signal are called voice recognizers (VR). A voice recognizer is composed of an acoustic processor, which extracts a sequence of information-bearing features (vectors) necessary for VR from the incoming raw speech, and a word decoder, which decodes this sequence of features (vectors) to yield the meaningful and desired format of output, such as a sequence of linguistic words corresponding to the input utterance. To increase the performance of a given system, training is required to equip the system with valid parameters. In other words, the system needs to learn before it can function optimally.

The acoustic processor represents a front end speech analysis subsystem in a voice recognizer. In response to an input speech signal, it provides an appropriate representation to characterize the time-varying speech signal. It should discard irrelevant information such as background noise, channel distortion, speaker characteristics and manner of speaking. Efficient acoustic feature will furnish voice recognizers with higher acoustic discrimination power. The most useful characteristic is the short time spectral envelope. In characterizing the short time spectral envelope, the two most commonly used spectral analysis techniques are linear predictive coding (LPC) and filter-bank based spectral analysis models. However, it is readily shown (as discussed in Rabiner, L.R. and Schafer, R.W., *Digital Processing of Speech Signals*, Prentice Hall, 1978) that LPC not only provides a good approximation to the vocal tract spectral envelope, but is considerably less expensive in computation than the filter-bank model in all digital implementations. Experience has also demonstrated that the performance of LPC based voice recognizers is

comparable to or better than that of filter-bank based recognizers (Rabiner, L.R. and Juang, B.H., *Fundamentals of Speech Recognition*, Prentice Hall, 1993).

Referring to Figure 1, in an LPC based acoustic processor, the input speech is provided to a microphone (not shown) and converted to an analog electrical signal. This electrical signal is then digitized by an A/D converter (not shown). The digitized speech signals are passed through preemphasis filter 2 in order to spectrally flatten the signal and to make it less susceptible to finite precision effects in subsequent signal processing. The preemphasis filtered speech is then provided to segmentation element 4 where it is segmented or blocked into either temporally overlapped or nonoverlapped blocks. The frames of speech data are then provided to windowing element 6 where framed DC components are removed and a digital windowing operation is performed on each frame to lessen the blocking effects due to the discontinuity at frame boundaries. A most commonly used window function in LPC analysis is the Hamming window, $w(n)$ defined as:

$$w(n) = 0.54 - 0.46 \cdot \cos\left(\frac{2\pi n}{N-1}\right), 0 \leq n \leq N-1 \quad (1)$$

The windowed speech is provided to LPC analysis element 8. In LPC analysis element 8 autocorrelation functions are calculated based on the windowed samples and corresponding LPC parameters are obtained directly from autocorrelation functions.

Generally speaking, the word decoder translates the acoustic feature sequence produced by the acoustic processor into an estimate of the speaker's original word string. This is accomplished in two steps: acoustic pattern matching and language modeling. Language modeling can be avoided in the applications of isolated word recognition. The LPC parameters from LPC analysis element 8 are provided to acoustic pattern matching element 10 to detect and classify possible acoustic patterns, such as phonemes, syllables, words, etc. The candidate patterns are provided to language modeling element 12, which models the rules of syntactic constraints that determine what sequences of words are grammatically well formed and meaningful. Syntactic information can be valuable guide to voice recognition when acoustic information alone is ambiguous. Based on language modeling, the VR sequentially interprets the acoustic feature matching results and provides the estimated word string.

Both the acoustic pattern matching and language modeling in the word decoder requires a mathematical model, either deterministic or stochastic, to describe the speaker's phonological and acoustic-phonetic variations. The

performance of a speech recognition system is directly related to the quality of these two modelings. Among the various classes of models for acoustic pattern matching, template-based dynamic time warping (DTW) and stochastic hidden Markov modeling (HMM) are the two most commonly used. However, it has
5 been shown that DTW based approach can be viewed as a special case of HMM based one, which is a parametric, doubly stochastic model. HMM systems are currently the most successful speech recognition algorithms. The doubly stochastic property in HMM provides better flexibility in absorbing acoustic as well as temporal variations associated with speech signals. This usually results
10 in improved recognition accuracy. Concerning the language model, a stochastic model, called k-gram language model which is detailed in F. Jelinek, "The Development of an Experimental Discrete Dictation Recognizer", Proc. IEEE, vol. 73, pp. 1616-1624, 1985, has been successfully applied in practical large vocabulary voice recognition systems. While in the small vocabulary case, a
15 deterministic grammar has been formulated as a finite state network (FSN) in the application of airline and reservation and information system (see Rabiner, L.R. and Levinson, S.Z., A Speaker-Independent, Syntax-Directed, Connected Word Recognition System Based on Hidden Markov Model and Level Building, IEEE Trans. on IASSP, Vol. 33, No. 3, June 1985).

20 Statistically, in order to minimize the probability of recognition error, the voice recognition problem can be formalized as follows: with acoustic evidence observation O , the operations of voice recognition are to find the most likely word string W^* such that

$$25 \quad W^* = \arg \max P(W | O) \quad (1)$$

where the maximization is over all possible word strings W . In accordance with Bayes rule, the posteriori probability $P(W | O)$ in the above equation can be
30 rewritten as:

$$P(W | O) = \frac{P(W) P(O | W)}{P(O)} \quad (2)$$

Since $P(O)$ is irrelevant to recognition, the word string estimate can be obtained
35 alternatively as:

$$W^* = \arg \max P(W) P(O | W) \quad (3)$$

Here $P(W)$ represents the a priori probability that the word string W will be uttered, and $P(O | W)$ is the probability that the acoustic evidence O will be
40 observed given that the speaker uttered the word sequence W . $P(O | W)$ is determined by acoustic pattern matching, while the a priori probability $P(W)$ is defined by language model utilized.

In connected word recognition, if the vocabulary is small (less than 100), a deterministic grammar can be used to rigidly govern which words can logically follow other words to form legal sentences in the language. The deterministic grammar can be incorporated in the acoustic matching algorithm implicitly to constrain the search space of potential words and to reduce the computation dramatically. However, when the vocabulary size is either medium (greater than 100 but less than 1000) or large (greater than 1000), the probability of the word sequence, $W=(w_1, w_2, \dots, w_N)$, can be obtained by stochastic language modeling. From simple probability theory, the prior probability, $P(W)$ can be decomposed as

$$P(W)=P(w_1, w_2, \dots, w_N)=\prod_{i=1}^N P(w_i | w_1, w_2, \dots, w_{i-1}) \quad (4)$$

where $P(w_i | w_1, w_2, \dots, w_{i-1})$ is the probability that w_i will be spoken given that the word sequence $(w_1, w_2, \dots, w_{i-1})$ precedes it. The choice of w_i depends on the entire past history of input words. For a vocabulary of size V , it requires V^i values to specify $P(w_i | w_1, w_2, \dots, w_{i-1})$ completely. Even for the mid vocabulary size, this requires a formidable number of samples to train the language model. An inaccurate estimate of $P(w_i | w_1, w_2, \dots, w_{i-1})$ due to insufficient training data will depreciate the results of original acoustic matching.

A practical solution to the above problems is to assume that w_i only depends on $(k-1)$ preceding words, $w_{i-1}, w_{i-2}, \dots, w_{i-k+1}$. A stochastic language model can be completely described in terms of $P(w_i | w_1, w_2, \dots, w_{i-k+1})$ from which k -gram language model is derived. Since most of the word strings will never occur in the language if $k > 3$, unigram ($k=1$), bigram ($k=2$) and trigram ($k=3$) are the most powerful stochastic language models that take grammar into consideration statistically. Language modeling contains both syntactic and semantic information which is valuable in recognition, but these probabilities must be trained from a large collection of speech data. When the available training data are relatively limited, such as K -grams may never occur in the data, $P(w_i | w_{i-2}, w_{i-1})$ can be estimated directly from bigram probability $P(w_i | w_{i-1})$. Details of this process can be found in F. Jelinek, "The Development of An Experimental Discrete Dictation Recognizer", Proc. IEEE, vol. 73, pp. 1616-1624, 1985. In connected word recognition, whole word model is used as the basic speech unit, while in continuous voice recognition, subband units, such as phonemes, syllables or demisyllables may be used as the basic speech unit. The word decoder will be modified accordingly.

Conventional voice recognition systems integrate acoustic processor and word decoders without taking into account their separability, the limitations of

application systems (such as power consumption, memory availability, etc.) and communication channel characteristics. This motivates the interest in devising a distributed voice recognition system with these two components appropriately separated.

5

SUMMARY OF THE INVENTION

The present invention is a novel and improved distributed voice recognition system, in which (i) the front end acoustic processor can be LPC
10 based or filter bank based; (ii) the acoustic pattern matching in the word decoder can be based on hidden Markov model (HMM), dynamic time warping (DTW) or even neural networks (NN); and (iii) for the connected or continuous word recognition purpose, the language model can be based on deterministic or stochastic grammars. The present invention differs from the usual voice
15 recognizer in improving system performance by appropriately separating the components: feature extraction and word decoding. As demonstrated in next examples, if LPC based features, such as cepstrum coefficients, are to be sent over communication channel, a transformation between LPC and LSP can be
20 used to alleviate the noise effects on feature sequence.

20

BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when
25 taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

Figure 1 is a block diagram of a traditional speech recognition system;

Figure 2 is a block diagram of an exemplary implementation of the present invention in a wireless communication environment;

30 Figure 3 is a general block diagram of the present invention;

Figure 4 is a block diagram of an exemplary embodiment of the transform element and inverse transform element of the present invention; and

Figure 5 is a block diagram of a preferred embodiment of the present invention comprising a local word detector in addition to a remote word
35 detector;

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

40 In a standard voice recognizer, either in recognition or in training, most of the computational complexity is concentrated in the word decoder subsystem of the voice recognizer. In the implementation of voice recognizers

with distributed system architecture, it is often desirable to place the word decoding task at the subsystem which can absorb the computational load appropriately. Whereas the acoustic processor should reside as close to the speech source as possible to reduce the effects of quantization errors introduced by signal processing and/or channel induced errors.

An exemplary implementation of the present invention is illustrated in Fig. 2. In the exemplary embodiment, the environment is a wireless communication system comprising a portable cellular telephone or personal communications device 40 and a central communications center referred to as a cell base station 42. In the exemplary embodiment the distributed VR system is presented. In the distributed VR the acoustic processor or feature extraction element 22 resides in personal communication device 40 and word decoder 48 resides in the central communications center. If, instead of distributed VR, VR is implemented solely in portable cellular phone it would be highly infeasible even for medium size vocabulary, connected word recognition due to high computation cost. On the other hand, if VR resides merely at the base station, the accuracy can be decreased dramatically due to the degradation of speech signals associated with speech codec and channel effects. Evidently, there are three advantages to the proposed distributed system design. The first is the reduction in cost of the cellular telephone due to the word decoder hardware that is no longer resident in the telephone 40. The second is a reduction of the drain on the battery (not shown) of portable telephone 40 that would result from locally performing the computationally intensive word decoder operation. The third is the expected improvement in recognition accuracy in addition to the flexibility and extendibility of the distributed system.

The speech is provided to microphone 20 which converts the speech signal into electrical signals which are provided to feature extraction element 22. The signals from microphone 20 may be analog or digital. If the signals are analog, then an analog to digital converter (not shown) may be needed to be interposed between microphone 20 and feature extraction element 22. The speech signals are provided to feature extraction element 22. Feature extraction element 22 extracts relevant characteristics of the input speech that will be used to decode the linguistic interpretation of the input speech. One example of characteristics that can be used to estimate speech is the frequency characteristics an input speech frame. This is frequently provided as linear predictive coding parameters of the input frame of speech. The extracted features of the speech are then provided to transmitter 24 which codes, modulates and amplifies the extracted feature signal and provides the features through duplexer 26 to antenna 28, where the speech features are transmitted to

cellular base station or central communications center 42. Various types of digital coding, modulation, and transmission schemes well known in the art may be employed.

At central communications center 42, the transmitted features are received at antenna 44 and provided to receiver 46. Receiver 46 may perform the functions of demodulating and decoding the received transmitted features which it provides to word decoder 48. Word decoder 48 determines, from the speech features, a linguistic estimate of the speech and provides an action signal to transmitter 50. Transmitter 50 performs the functions of amplification, modulation and coding of the action signal, and provides the amplified signal to antenna 52, which transmits the estimated words or a command signal to portable phone 40. Transmitter 50 may also employ well known digital coding, modulation or transmission techniques.

At portable phone 40, the estimated words or command signals are received at antenna 28, which provides the received signal through duplexer 26 to receiver 30 which demodulates, decodes the signal and then provides the command signal or estimated words to control element 38. In response to the received command signal or estimated words, control element 38 provides the intended response (e.g., dialing a phone number, providing information to display screen on the portable phone, etc.).

The same system represented in Figure 2 could also serve in a slightly different way in that the information sent back from central communications center 42 need not be an interpretation of the transmitted speech, rather the information sent back from central communications center 42 may be a response to the decoded message sent by the portable phone. For example, one may inquire of messages on a remote answering machine (not shown) coupled via a communications network to central communications center 42, in which case the signal transmitted from central communications center 42 to portable telephone 40 may be the messages from the answering machine in this implementation. A second control element 49 would be collocated in the central communications center.

The significance of placing the feature extraction element 22 in portable phone 40 instead of at central communications center 42 is as follows. If the acoustic processor is placed at central communications center 42, as opposed to distributed VR, a low bandwidth digital radio channel may require a vocoder (at the first subsystem) which limits resolution of features vectors due to quantization distortion. However, by putting the acoustic processor in the portable or cellular phone, one can dedicate entire channel bandwidth to feature transmission. Usually, the extracted acoustic feature vector requires less

bandwidth than the speech signal for transmission. Since recognition accuracy is highly dependent on degradation of input speech signal, one should provide feature extraction element 22 as close to user as possible so that feature extraction element 22 extracts feature vectors based on microphone speech, instead of (vocoded) telephone speech which may be additionally corrupted in transmission.

In real applications, voice recognizers are designed to operate under ambient conditions, such as background noise. Thus, it is important to consider the problem of voice recognition in the presence of noise. It has been shown that, if the training of vocabulary (reference patterns) is performed in the exact (or approximate) same environment as the test condition, voice recognizers not only can provide good performance even in very noisy environments, but can reduce the degradation in recognition accuracy due to noise significantly. The mismatch between training and test conditions accounts for one of the major degradation factors in recognition performance. With the assumption that acoustic features can traverse communication channels more reliably than speech signals (since acoustic features require less bandwidth than speech signals for transmission as mentioned previously), the proposed distributed voice recognition system is advantageous in providing matching conditions. If a voice recognizer is implemented remotely, the matching conditions can be badly broken due mainly to channel variations such as fading encountered in wireless communications. Implementing VR locally may avoid these effects if the huge training computations can be absorbed locally. Unfortunately, in many applications, this is not possible. Obviously, distributed voice recognition implementation can avoid mismatch conditions induced by channel perplexity and compensate for the shortcomings of centralized implementations.

Referring to Figure 3, the digital speech samples are provided to feature extraction element 51 which provides the features over communication channel 56 to word estimation element 62 where an estimated word string is determined. The speech signals are provided to acoustic processor 52 which determines potential features for each speech frame. Since word decoder requires acoustic feature sequence as input for both recognition and training tasks, these acoustic features need to be transmitted across the communication channel 56. However, not all potential features used in typical voice recognition systems are suitable for transmission through noisy channels. In some cases, transformation element 22 is required to facilitate source encoding and to reduce the effects of channel noise. One example of LPC based acoustic

features which are widely used in voice recognizers is cepstrum coefficients, $\{c_i\}$. They can be obtained directly from LPC coefficients $\{a_i\}$ as follows:

$$c_m = a_m + \sum_{k=1}^{m-1} \left(\frac{k}{m}\right) c_k a_{m-k}, \quad m=1, \dots, P \quad (5)$$

5

$$c_m = \sum_{k=1}^{m-1} \left(\frac{k}{m}\right) c_k a_{m-k}, \quad m=P+1, \dots, Q \quad (6)$$

where P is the order of LPC filter used and Q is the size of cepstrum feature vector. Since cepstrum feature vectors change rapidly, it is not easy to compress a sequence of frames of cepstrum coefficients. However, there exists a transformation between LPCs and line spectrum pair (LSP) frequencies which changes slowly and can be efficiently encoded by a delta pulse coded modulation (DPCM) scheme. Since cepstrum coefficients can be derived directly from LPC coefficients, LPCs are transformed into LSPs by transform element 54 which are then encoded to traverse the communication channel 56. At remote word estimation element 62, the transformed potential features are inverse transformed by inverse transform element 60 to provide acoustic features to word decoder 64 which in response provides an estimated word string.

An exemplary embodiment of the transform element 54 is illustrated in Figure 4 as transform subsystem 70. In figure 4, the LPC coefficients from acoustic processor 52 are provided to LPC to LSP transformation element 72. Within LPC to LSP element 72 the LSP coefficients can be determined as follows. For P th order LPC coefficients, the corresponding LSP frequencies are obtained as the P roots which reside between 0 and π of the following equations:

$$P(w) = \cos 5w + p_1 \cos 4w + \dots + p_5 / 2 \quad (7)$$

$$Q(w) = \cos 5w + q_1 \cos 4w + \dots + q_5 / 2 \quad (8)$$

where p_i and q_i can be computed recursively as follows:

$$p_0 = q_0 = 1 \quad (9)$$

35

$$p_i = -a_i - a_{P-i} p_{i-1}, \quad 1 \leq i \leq P/2 \quad (10)$$

$$q_i = -a_i + a_{P-i} q_{i-1}, \quad 1 \leq i \leq P/2 \quad (11)$$

The LSP frequencies are provided to DPCM element 74 where they are encoded for transmission over communication channel 76.

At inverse transformation element 78, the received signal from channel is passed through inverse DPCM element 80 and LPC to LSP element 82 to
5 recover the LSP frequencies of the speech signal. The inverse process of LPC to LSP element 72 is performed by LSP to LPC element 82 which converts the LSP frequencies back into LPC coefficients for use in deriving the cepstrum coefficients. LSP to LPC element 82 performs the conversion as follows:

$$10 \quad P(z) = (1+z^{-1}) \prod_{i=1}^{P/2} (1 - 2\cos(w_{2i-1})z^{-1} + z^{-2}) \quad (12)$$

$$Q(z) = (1-z^{-1}) \prod_{i=1}^{P/2} (1 - 2\cos(w_{2i})z^{-1} + z^{-2}) \quad (13)$$

$$15 \quad A(z) = 1 - \sum_{i=1}^P a_i z^{-i} = \frac{P(z)+Q(z)}{2} \quad (14)$$

The LPC coefficients are then provided to LPC to cepstrum element 84 which provides the cepstrum coefficients to word decoder 64 in accordance with equations 5 and 6.

Since the word decoder relies solely on an acoustic feature sequence,
20 which can be prone to noise if transmitted directly through the communication channel, a potential acoustic feature sequence is derived and transformed in the subsystem 51 as depicted in Figure 3 into an alternative representation that facilitates transmission. The acoustic feature sequence for use in word decoder is obtained afterwards through inverse transformation. Hence, in distributed
25 implementation of VR, the feature sequence sent through the air (channel) can be different from the one really used in word decoder. It is anticipated that the output from transform element 70 can be further encoded by any error protection schemes that are known in the art.

In Figure 5, an improved embodiment of the present invention is
30 illustrated. In wireless communication applications, users may desire not to occupy the communication channel for a small number of simple, but commonly used voiced commands, in part due to expensive channel access. This can be achieved by further distributing the word decoding function between handset 100 and base station 110 in the sense that a voice recognition
35 with a relatively small vocabulary size is implemented locally at handset while a second voice recognition system with larger vocabulary size resides remotely at base station. They both share the same acoustic processor at handset. The vocabulary table in local word decoder contains most widely used words or

word strings. The vocabulary table in remote word decoder, on the other hand, contains regular words or word strings. Based on this infrastructure, as illustrated in Figure 5, the average time that channel is busy may be lessened and the average recognition accuracy increased.

5 Moreover, there will exist two groups of voiced commands available, one, called special voiced command, corresponds to the commands recognizable by local VR and the other, called regular voiced command, corresponds to those not recognized by the local VR. Whenever a special
10 voiced command is issued, the real acoustic features are extracted for local word decoder and voice recognition function is performed locally without accessing communication channel. When a regular voiced command is issued, transformed acoustic feature vectors are transmitted through channel and word decoding is done remotely at base station.

 Since the acoustic features need not be transformed, nor be coded, for
15 any special voiced command and vocabulary size is small for local VR, the required computation will be much less than that of the remote one (the computation associated with the search for correct word string over possible vocabularies is proportional to vocabulary size). Additionally, the local voice recognizer may be modeled with a simplified version of HMM (such as with a
20 lower number of states, a lower number of mixture components for state output probabilities, etc.) compared to remote VR, since the acoustic feature will be fed directly to local VR without potential corruption in the channel. This will enable a local, though limited vocabulary, implementation of VR at handset (subsystem 1) where computational load is limited. It is envisioned that the
25 distributed VR structure can also be used in other target applications different than wireless communication systems.

 Referring to Figure 5, speech signals are provide to acoustic processor
102, which then extracts features, for example LPC based feature parameters, from the speech signal. These features are then provided to local word
30 decoder 106 which searches to recognize the input speech signal from its small vocabulary. If it fails to decode the input word string and determines that remote VR should decode it, it signals transform element 104 which prepares the features for transmission. The transformed features are then transmitted over communication channel 108 to remote word decoder 110. The
35 transformed features are received at inverse transform element 112, which performs the inverse operation of transform element 104 and provides the acoustic features to remote word decoder element 114 which in response provides the estimate remote word string.

The previous description of the preferred embodiments is provided to enable any person skilled in the art to make or use the present invention. The various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to
5 other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

10 WE CLAIM:

CLAIMS

1. A voice recognition system comprising
 - 2 feature extraction means located at a remote station for receiving a frame
 - 4 of speech samples and extracting a set of speech features from said frame of
 - 6 speech samples in accordance with a predetermined feature extraction format
 - 8 and for providing said set of speech features: and
 - word decoder located at a central processing station for receiving said
 - set of speech features and for determining a syntax in accordance with a
 - predetermined decoding format.
2. The system of Claim 1 wherein said set of features are linear
 - 2 predictive coding parameters.
3. The system of Claim 1 further comprising a local word detector
 - 2 collocated in said remote station for determining a syntax in accordance with a
 - predetermined small vocabulary decoding format.

PRIOR ART

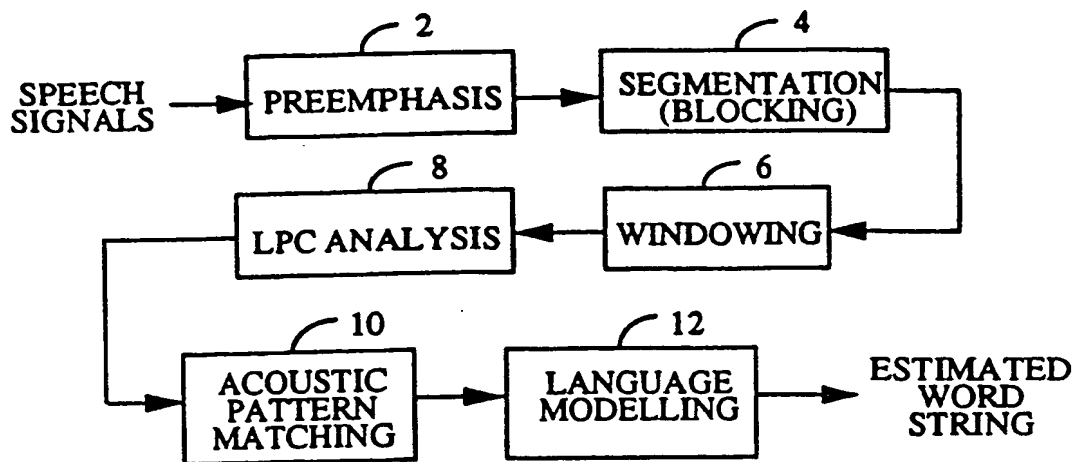


FIG. 1


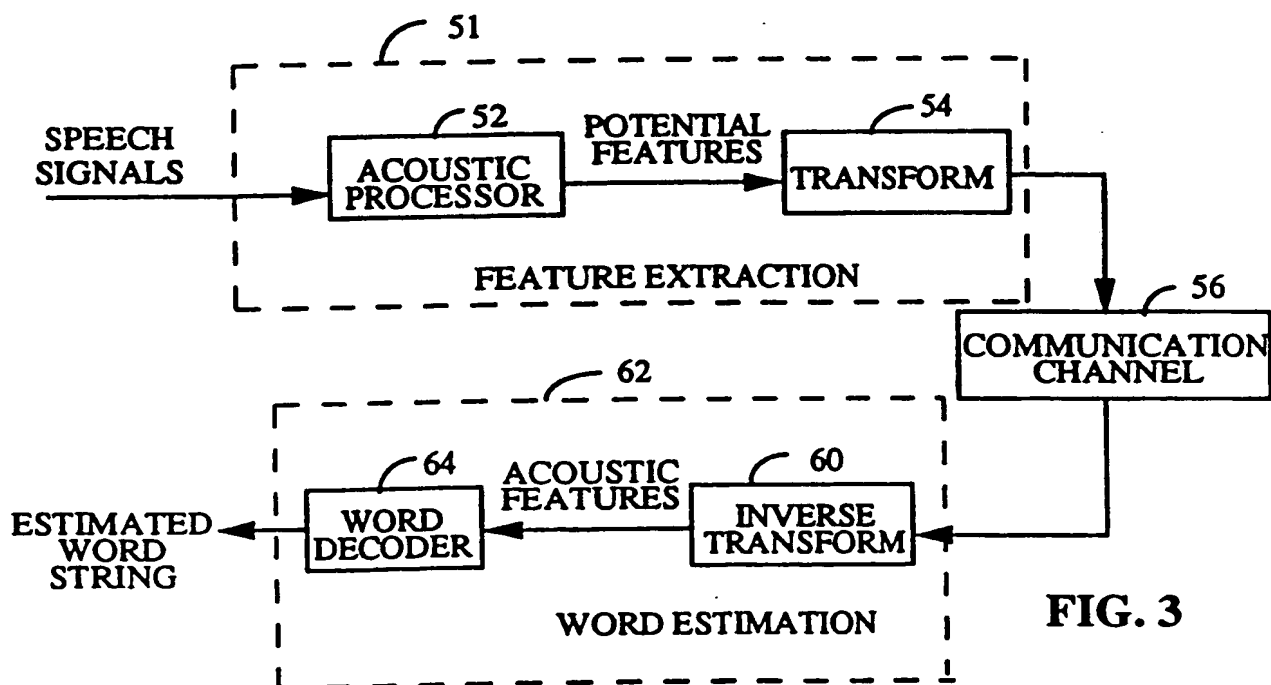


FIG. 3

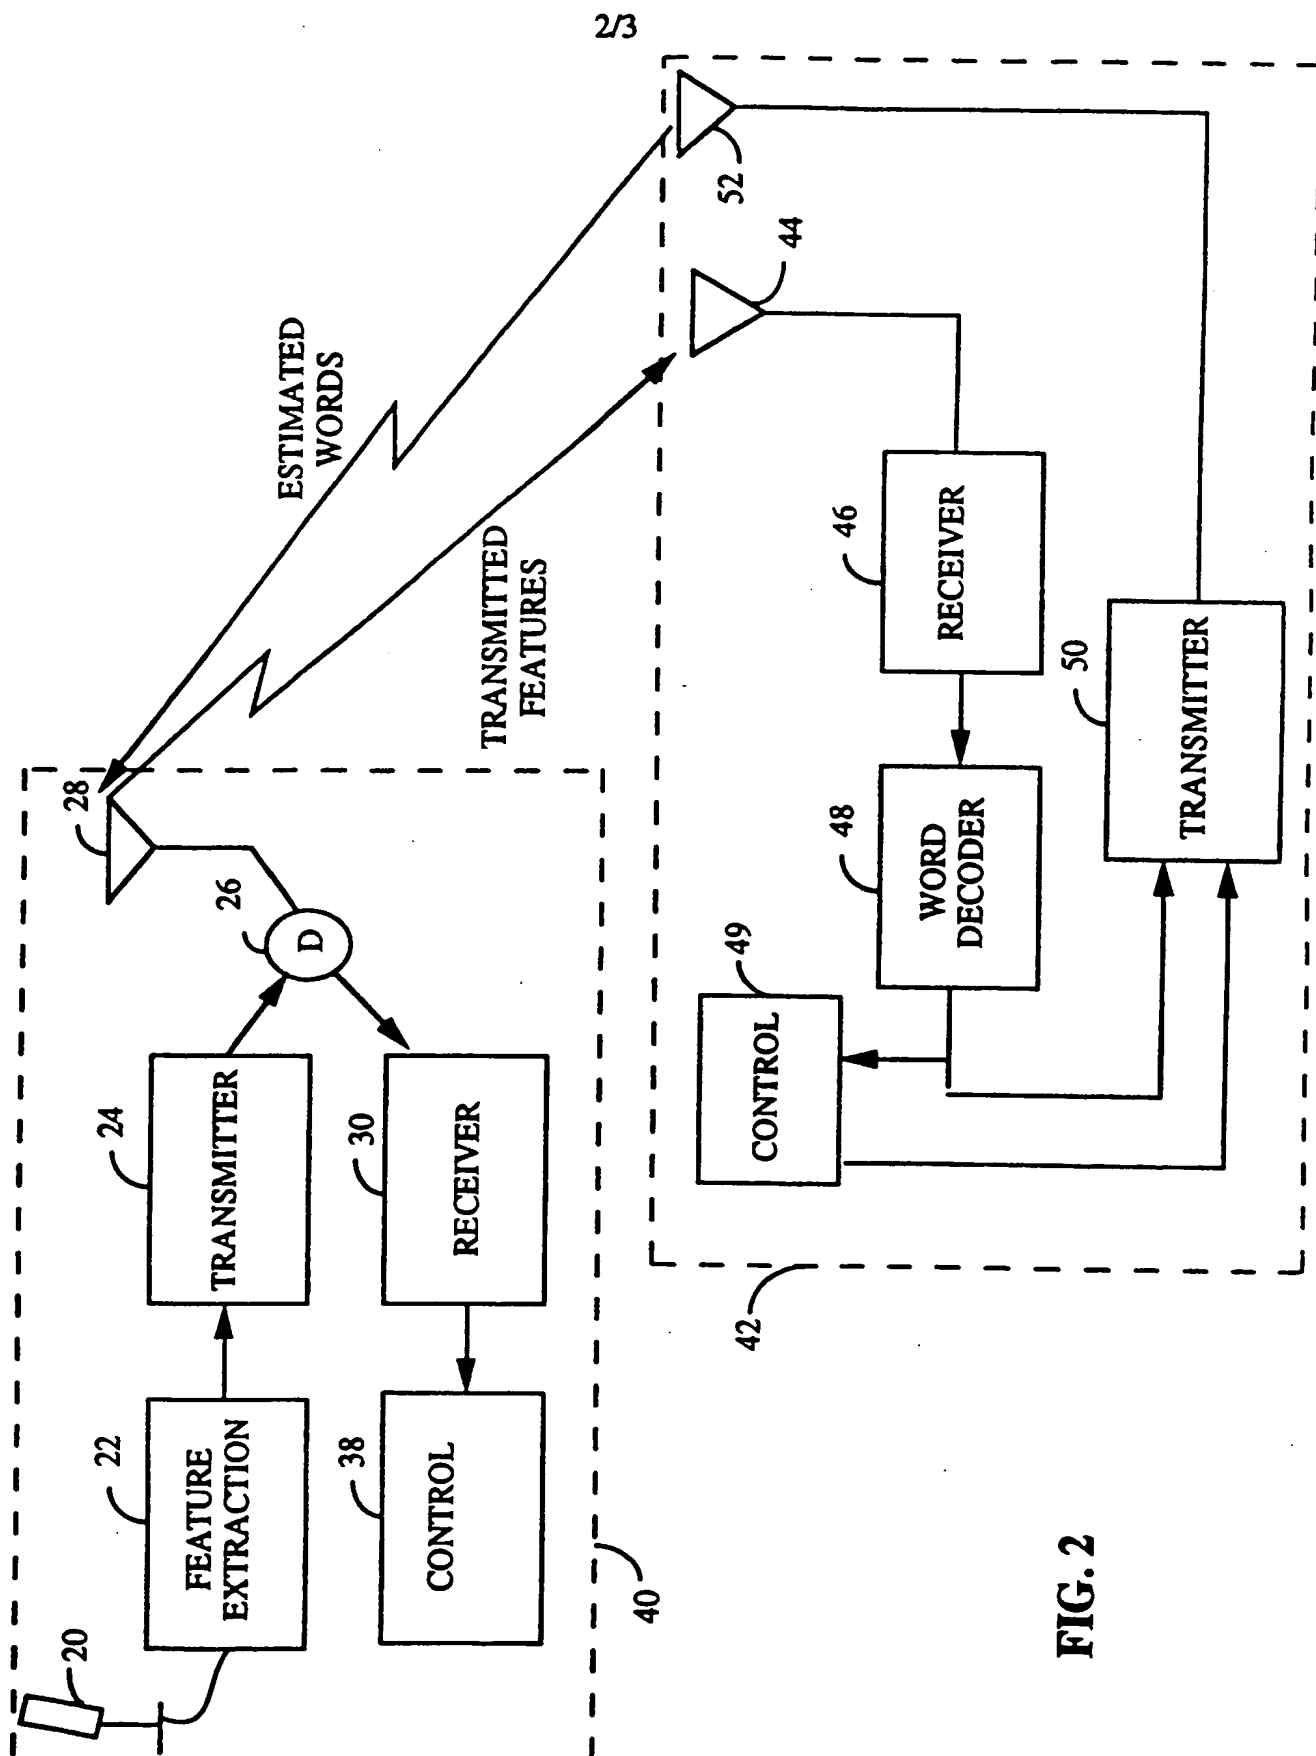

3/3

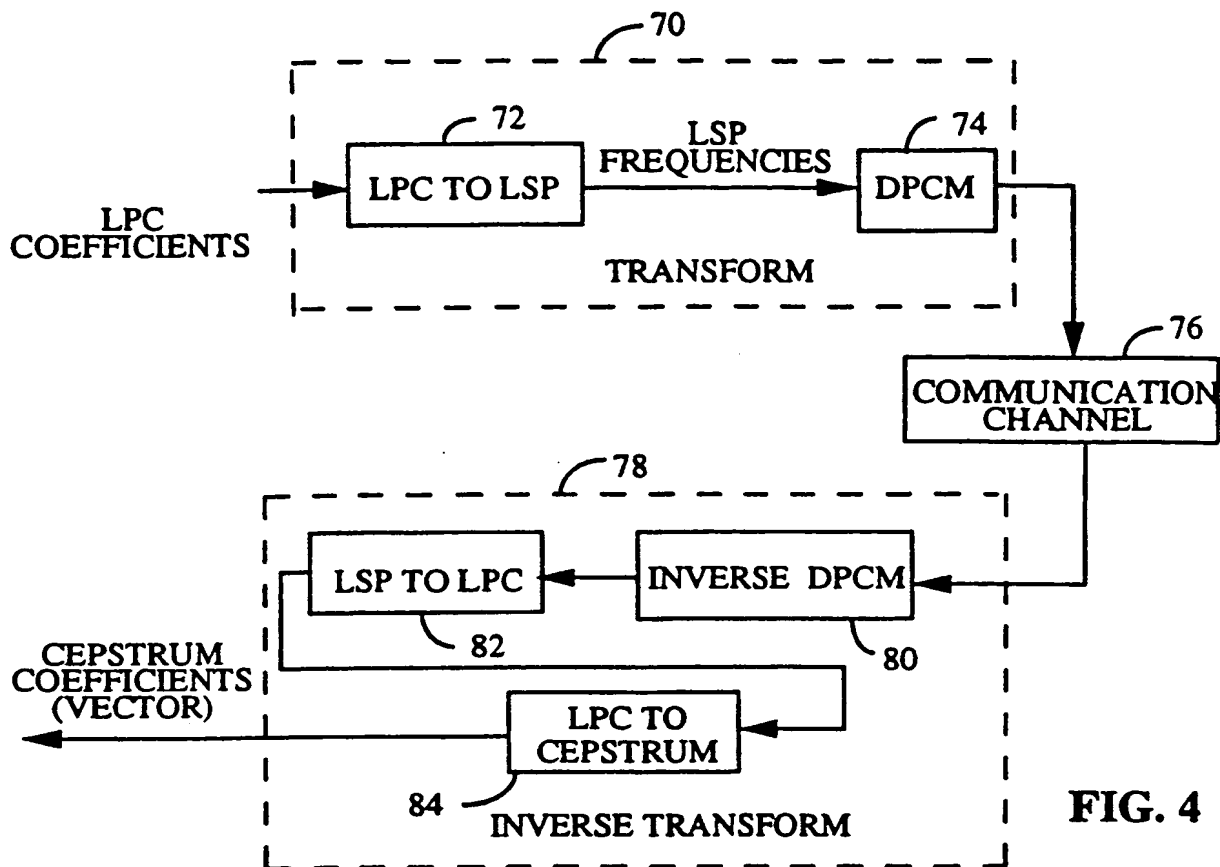


FIG. 4

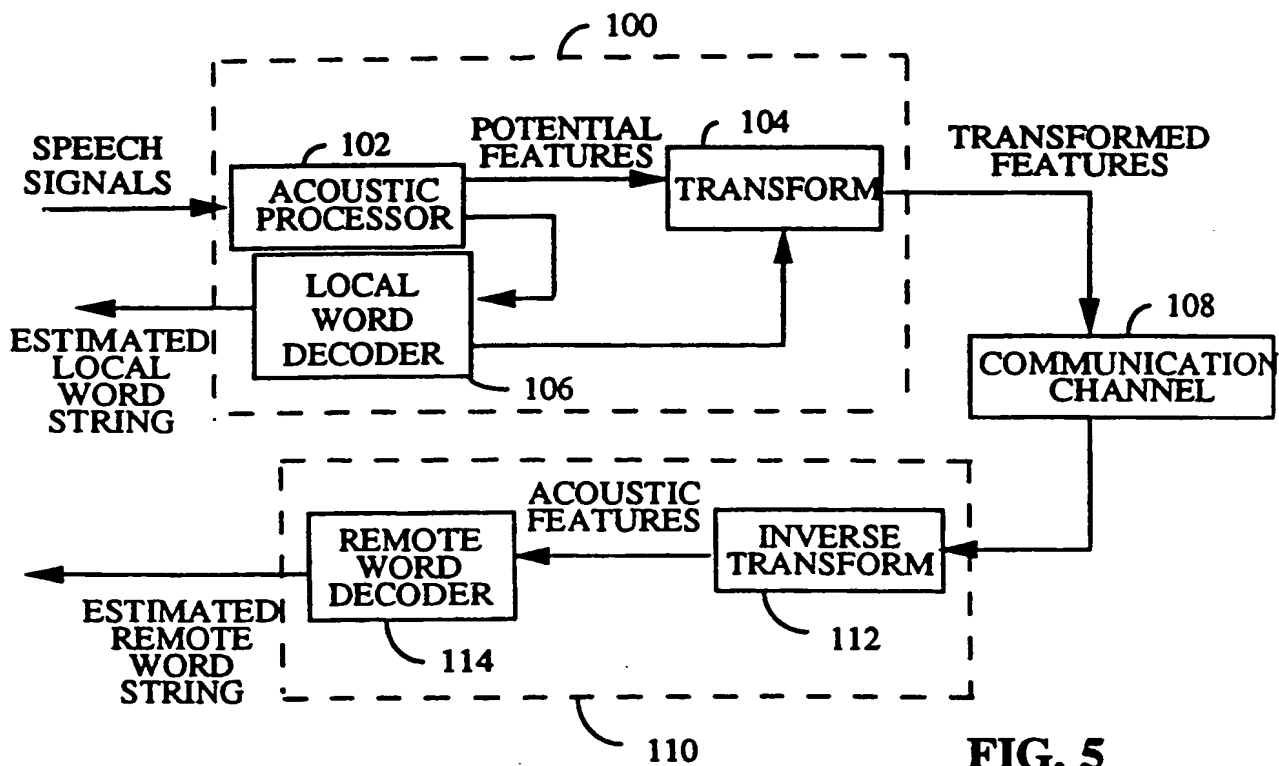


FIG. 5

INTERNATIONAL SEARCH REPORT

Application No
PCT/US 94/14803

A. CLASSIFICATION OF SUBJECT MATTER G 10 L 5/06, G 10 L 5/02, G 10 L 5/00, G 10 L 7/08, G 10 L 9/06		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) G 10 L, G 06 F, H 04 M		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP, A, 0 534 410 (NIPPON HASO KYOKAI) 31 March 1993 (31.03.93), fig. 1; abstract; claim 1. ---	1
A	EP, A, 0 177 405 (REGIE NATIONALE DES USINES RENAULT) 09 April 1986 (09.04.86), fig. 1; abstract; claim 1. ---	1
A	EP, A, 0 108 354 (INTERNATIONAL STANDARD ELECTRIC CORPORATION) 16 May 1984 (16.05.84), fig. 1; abstract; claim 1. ----	1
<input type="checkbox"/> Further documents are listed in the continuation of box C. <input type="checkbox"/> Patent family members are listed in annex.		
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>* Special categories of cited documents :</p> <p>* "A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>* "E" earlier document but published on or after the international filing date</p> <p>* "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>* "O" document referring to an oral disclosure, use, exhibition or other means</p> <p>* "P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>* "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>* "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>* "&" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search <div style="text-align: center;">20 March 1995</div>		Date of mailing of the international search report <div style="text-align: center;">07.04.95</div>
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patendaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl, Fax (+ 31-70) 340-3016		Authorized officer <div style="text-align: center;">BERGER e.h.</div>

ANHANG

ANNEX

ANNEXE

zum internationalen Recherchen-
bericht über die internationale
Patentanmeldung Nr.

to the International Search
Report to the International Patent
Application No.

au rapport de recherche inter-
national relatif à la demande de brevet
international n°

PCT/US 94/14803 SAE 102006

In diesem Anhang sind die Mitglieder
der Patentfamilien der im obenge-
nannten internationalen Recherchenbericht
angeführten Patentdokumente angegeben.
Diese Angaben dienen nur zur Unter-
richtung und erfolgen ohne Gewähr.

This Annex lists the patent family
members relating to the patent documents
cited in the above-mentioned inter-
national search report. The Office is
in no way liable for these particulars
which are given merely for the purpose
of information.

La présente annexe indique les
membres de la famille de brevets
relatifs aux documents de brevets cités
dans le rapport de recherche inter-
national visée ci-dessus. Les renseigne-
ments fournis sont donnés à titre indica-
tif et n'engagent pas la responsabilité
de l'Office.

Im Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
EP A2 534410	31-03-93	EP A3 534410 JP A2 5257490 US A 5305420 JP A2 5080796	08-12-93 08-10-93 19-04-94 02-04-93
EP A1 177405	09-04-86	CA A1 1260068 DE C0 3562852 EP B1 177405 FR A1 2571191 FR B1 2571191 US A 4731811	26-09-89 23-06-88 18-05-88 04-04-86 26-12-86 15-03-88
EP A2 108354	16-05-84	BE A1 898134 CA A1 1198216 EP A3 108354 ES A1 526988 ES A5 526988 ES A1 8601536 JP A2 59144967 JP B4 61046865 US A 4567606	03-05-84 17-12-85 15-10-86 01-10-85 20-11-85 16-02-86 20-08-84 16-10-86 28-01-86

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)